


JUNE 1978


NE-66MQ TYPE CONNECTING BLOCKS

SEE RATINGS
BELOW

NE-66MQ2A

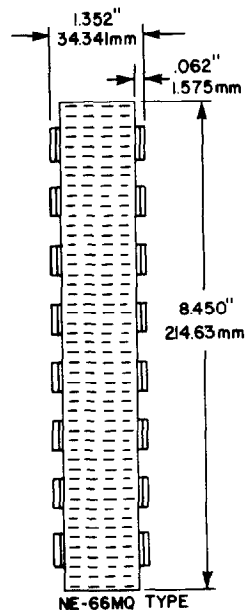

NE-66MQ4A

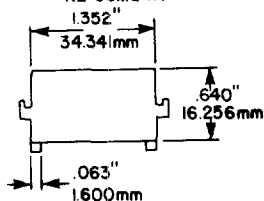

Consists of insulation slicing, phosphor bronze quick connect terminals arranged in two rows and mounted in a plastic block moulded from flame retardant material. The terminals are retained in the block by a combination backplate and fanning strip moulded from the same material and designed to provide a fanning strip on each side of the block.

Initial Use: To be mounted by means of the NE-89QA bracket on the QBA Type Backboards.

CODE	NO. OF CLIPS PER TERMINAL	NO. OF TERMINALS PER ROW	RATING
NE-66MQ2A	2	50	STANDARD
NE-66MQ4A	4	25	STANDARD