
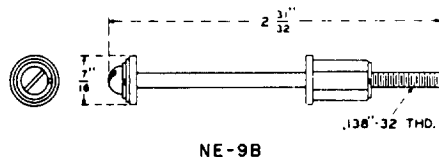


Orders must specify whether resistor mounting is to be located on the apparatus or terminal side when ordered mounted on mounting plates.

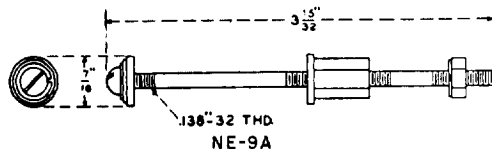

NE-9A:

Round head machine screw, suitable lock and flat washers, a hexagonal nut, a screw bushing and two asbestos washers for bolting resistor to mounting plates 0.082 inch to 0.219 inch thick.

Intended for mounting NE-100 or similar type resistors having an inside diameter of approximately 0.188 inch and a length of approximately 2 inches.

NE-9B:

Same as NE-9A except shorter screw is used, it is not equipped with hexagonal nut and bushing is not threaded.

Used instead of NE-9A to mount resistor in a tapped hole.

Code	Rating
NE-9A	Standard
NE-9B	"

