


May 28, 1929.

P. G. EDWARDS ET AL

1,714,551

CABLE TESTING ARRANGEMENT

Filed Sept. 13, 1927

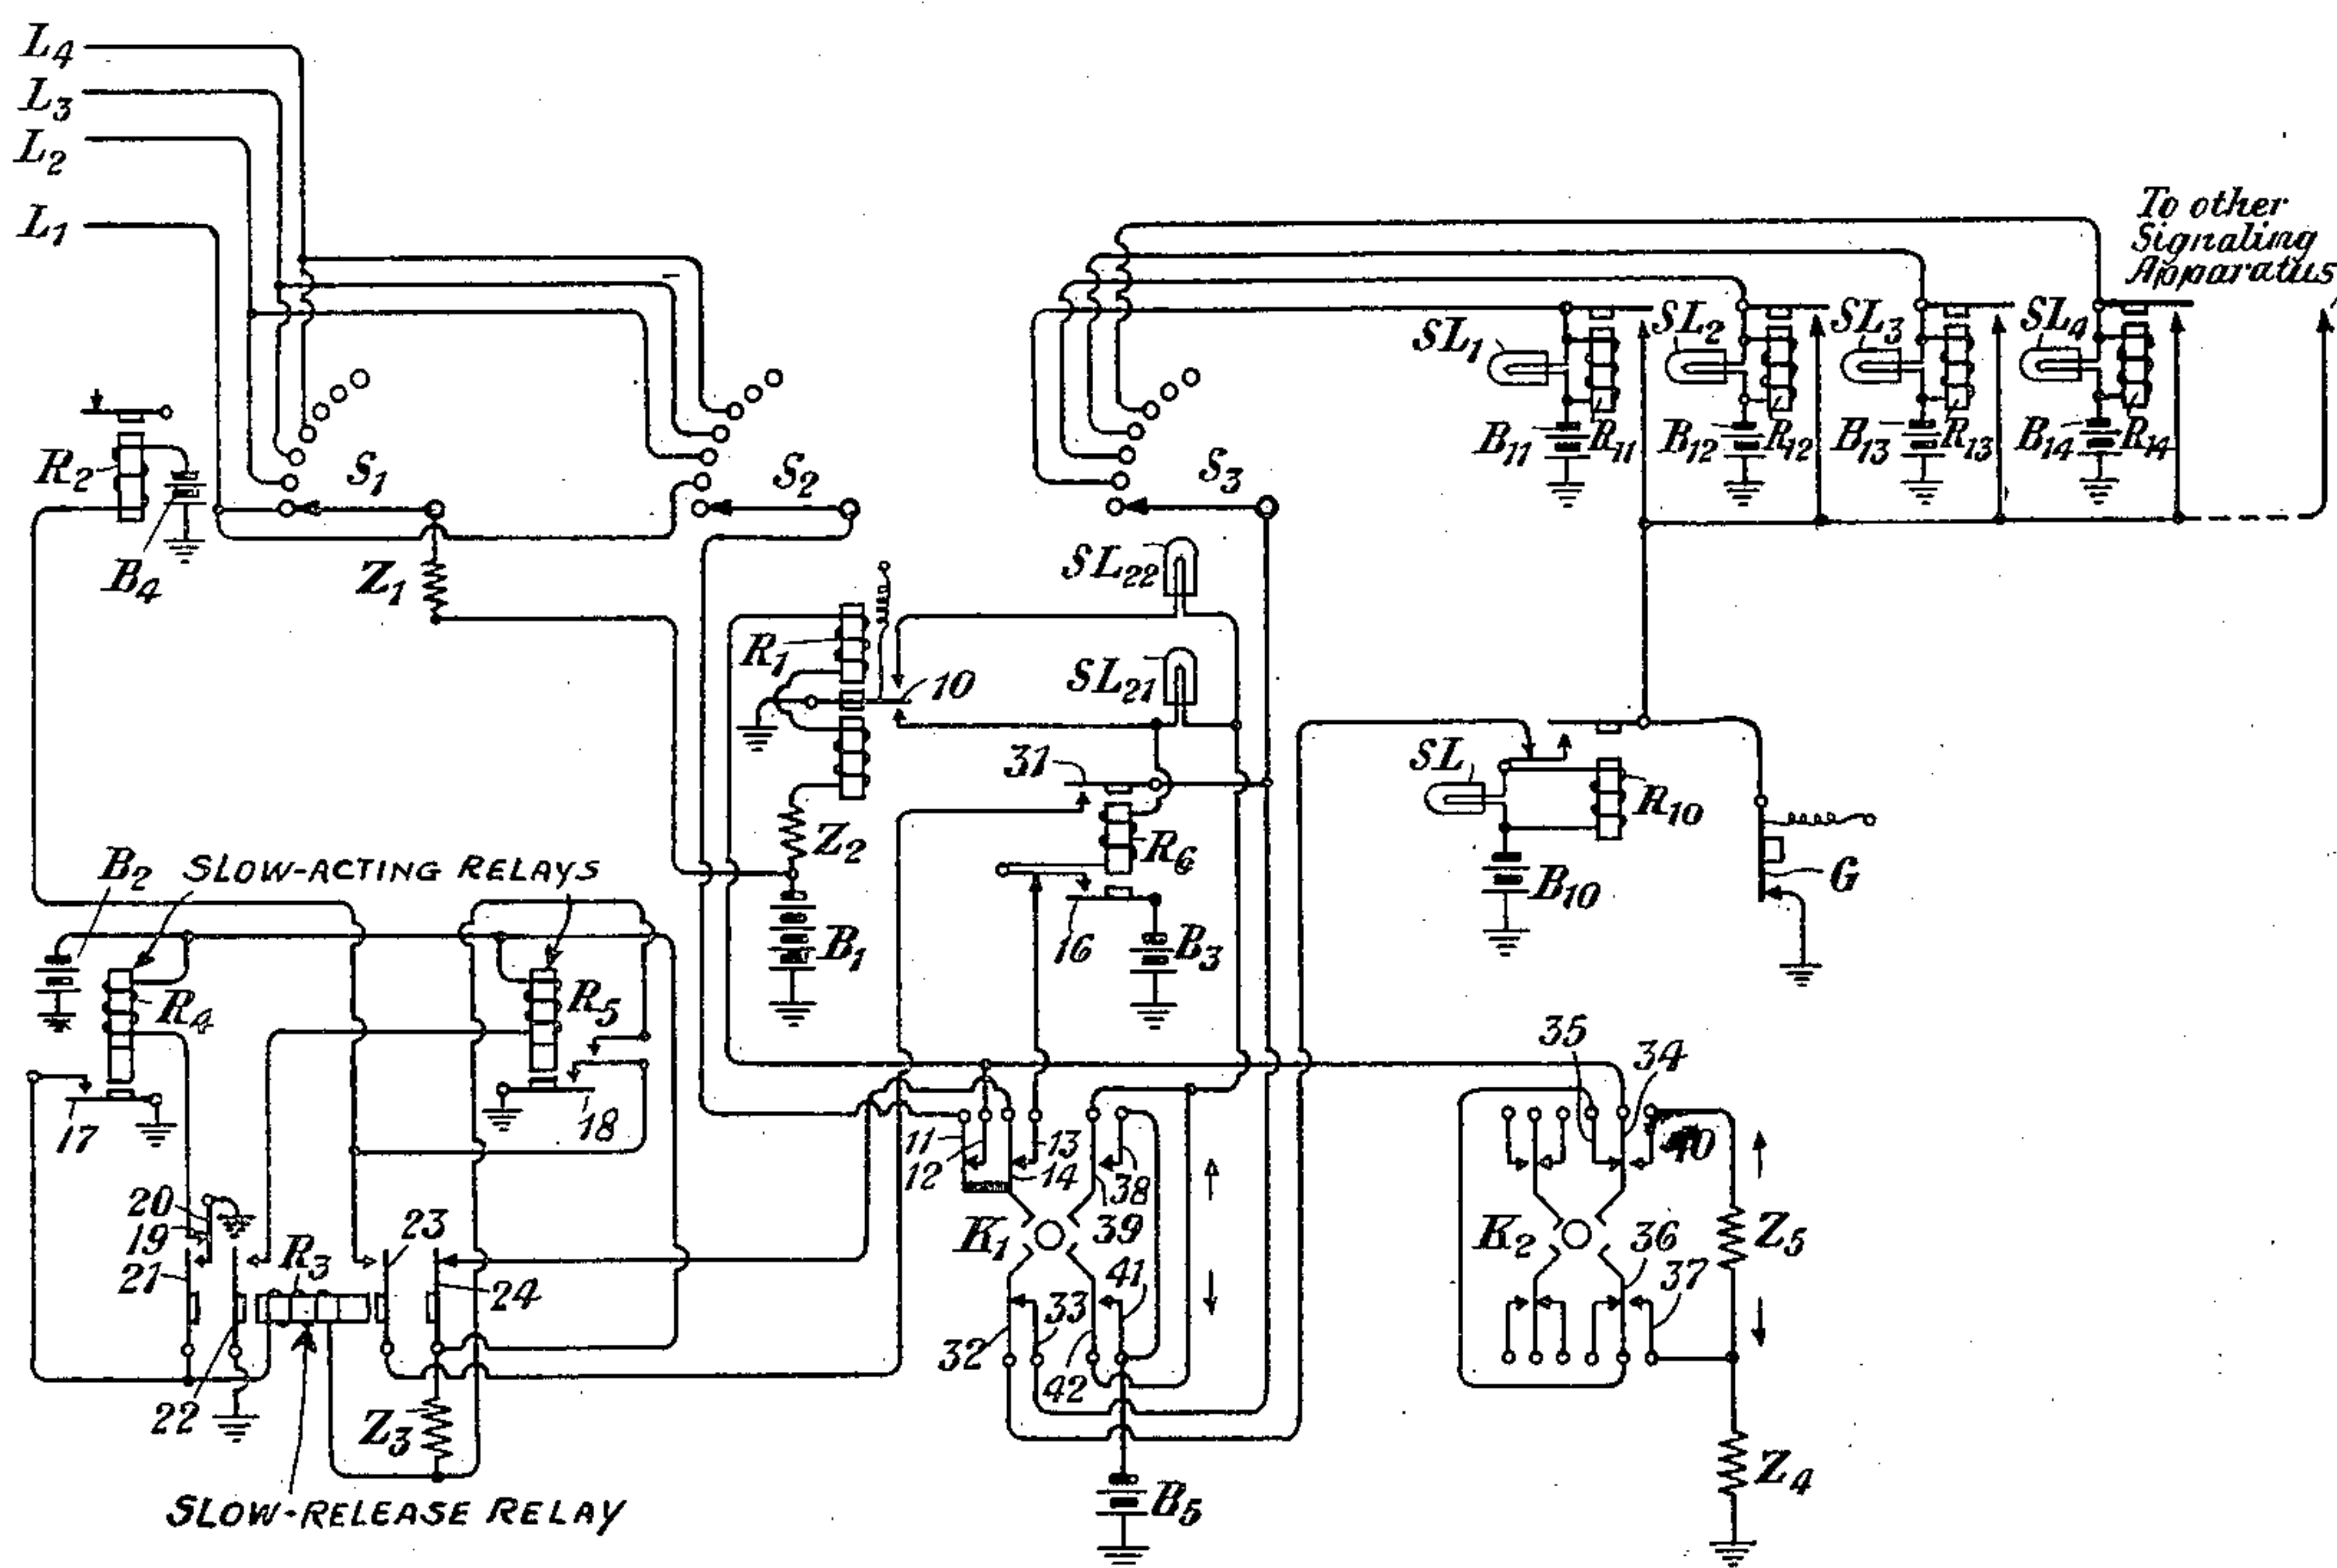

INVENTORS
P. G. Edwards and H. W. Herrington

BY

J. E. York
ATTORNEY

Patented May 28, 1929.

1,714,551

UNITED STATES PATENT OFFICE.

PAUL G. EDWARDS, OF BROOKLYN, NEW YORK, AND HAROLD W. HERRINGTON, OF MONTCLAIR, NEW JERSEY, ASSIGNORS TO AMERICAN TELEPHONE AND TELEGRAPH COMPANY, A CORPORATION OF NEW YORK.

CABLE-TESTING ARRANGEMENT.

Application filed September 13, 1927. Serial No 219,341.

This invention relates to systems for testing cables in order to detect the presence of low insulation or high leakage. More particularly, this invention relates to arrangements for continuously testing a plurality of conductors composing one or more cables in order to determine the presence of troubles due to low insulation, high leakage, or the like, preferably in the early stages of development.

In accordance with this invention, an arrangement is provided for continuously testing a plurality of conductors of one or more cables to determine whether a leak has developed, or whether the insulation resistance has decreased so as to render the system susceptible to failure for practical purposes. The particular testing system to be described does not paralyze the circuit arrangements connected to the conductors of the cable or cables so as to prevent their normal use in, for example, telephony, the testing system being merely supplemental to these circuit arrangements and introducing no substantial change in the electrical properties of the conductors. There is provided a sensitive detector or leak, such, for example, as a relay having an armature which may be moved from one contact to another as the current through the winding thereof changes by small increments. Obviously, a vacuum tube system of the detector type, or a system for measuring insulation resistance, or the like, may be substituted therefor without deviating from the principles of the invention. A feature of the invention includes an alarm, visual or audible, which may become operative when trouble in one or more of the conductors begins to develop. The alarm feature to be described will include a plurality of devices, one associated with each of the conductors, so that a particular conductor, or particular conductors, in which trouble is being developed may be promptly located.

Accordingly, it is one of the objects of this invention to provide a system for measuring the insulation property of a conductor by charging that conductor to a particular voltage and then continuously transmitting current over the conductor so as to be able to observe whether said current is greater than or less than a definite value.

It is another object of this invention to provide a system for detecting trouble due to

low insulation, high leakage, or the like, in the conductors of one or more cables, the system involving means for measuring the resistance of the various conductors to determine the presence or absence of suitable properties of insulation, leakage, or the like, and indicating which of the conductors have sufficiently departed from the normal and suitable values and are thereby subjecting the system to possible failures in service.

Another object of the invention is to provide a testing system for testing insulation, leakage, or the like, in a plurality of conductors or other transmission channels by progressively charging the various conductors or transmission channels to substantially the same voltage, thereafter progressively determining the current magnitudes of the various conductors under continuous current conditions for a definite time interval, and indicating which of the conductors or transmission channels are unable to maintain currents of suitable amplitudes continuously during those intervals. It becomes necessary in such a system to obviate the difficulties caused by transients arising from inductive interference, or the like.

While this invention will be pointed out with particularity in the appended claims, the invention itself, both as to its further objects and features, will be better understood with the detailed description hereinafter following, when read in connection with the accompanying drawing showing one embodiment of the invention merely for the purpose of illustration.

The embodiment of the invention shown herein merely for illustrative purposes discloses a system for automatically switching testing apparatus from one conductor L_1 to another conductor L_2 , then to another conductor L_3 , and so on. Machine switching apparatus is provided, comprising a selector having three banks, one bank being employed for progressively connecting the various conductors to a battery B_1 , or other source of definite voltage, so that the various conductors may be brought to the same initial conditions of voltage. Another of the selector banks is employed for subsequently connecting each of these conductors to a detector or relay, such as relay R_1 so that these electrical charges of these conductors may progressively cause a flow of current through the

winding of the relay, these currents indicating whether the insulation properties, leakage properties, or the like, are satisfactory or not. The third selector bank may bring about the illumination of a plurality of signal lamps SL_1, SL_2, SL_3, SL_4 , etc., one corresponding to each of the conductors L_1, L_2, L_3, L_4 , etc., so that trouble may be visually indicated to the attendant. The reference character SL designates a signal lamp employed to provide a general alarm. The illumination of this signal lamp operates to signal the attendant that one or more of the lamps SL_1, SL_2 , etc., corresponding to one or more of the various conductors, have operated, and advises the attendants to make the necessary repairs on the particular troubled conductors in order to prevent ultimate failure in service.

The three selector banks have selector arm S_1, S_2 and S_3 which are preferably located upon the same shaft so that they may revolve in synchronism. One end of the shaft has a notched wheel (not shown). Relay R_2 controls the rotation of the selector arms S_1, S_2 and S_3 . A ratchet arm (not shown) is associated with the armature of relay R_2 and moves across the notched wheel when the winding of relay R_2 becomes energized, the notched wheel, however, not being rotated. When relay R_2 becomes deenergized, a spring attached thereto moves the armature back to its normal position, and the notched wheel is rotated in a clockwise direction, thereby advancing each of the selector arms one step. Since the selector arms are all located on the same shaft and are tied together, they revolve in synchronism.

As has already been stated, the selector arm S_1 revolves in a clock-wise direction to progressively connect each of the conductors L_1, L_2, L_3 and L_4 , etc., to the battery B_1 . Accordingly, each of the lines is charged by the battery B_1 to a definite voltage to ground, the charging circuit for conductor L_1 , for example, including battery B_1 , impedance Z_1 , selector arm S_1 , conductor L_1 , and ground. Each of the conductors has a leak to ground of a definite amount. As the selector arms move to their respective second contact points, the conductor L_2 becomes charged, while conductor L_1 becomes connected to the testing circuit, which includes conductor L_1 , selector arm S_2 , contacts 11 and 12 of a key K_1 , the winding of relay R_1 , impedance Z_2 , battery B_1 , and ground. If sufficient current flows through conductor L_1 and through relay R_1 , the armatures of relay R_1 will be moved downwardly and will cause relay R_6 to become operated, the circuit causing the operation of relay R_6 including the armature of relay R_1 , the winding of relay R_6 , contacts 13 and 14 of key K_1 , armature 24 of relay R_3 and its contact, a battery B_2 , and

ground. Relay R_6 then becomes locked by the flow of current through its winding from a battery B_3 , the locking circuit including battery B_3 , armature 16 of relay R_6 , the winding of relay R_6 , armature 10 of relay R_1 , and ground. It is to be observed that relay R_6 is of the make-before-break type, permitting the relay to be first operated by the flow of current through its winding from a battery B_2 , and thereafter to become locked by a similar flow of current from another battery B_3 .

Two dash-pot relays, which may preferably be substantially alike in their operating characteristics, are designated by the reference characters R_4 and R_5 . It takes either of these relays a definite time interval to cause its armature to close the associated contact. Thus, fifteen seconds may be required to cause armature 17 or armature 18 to close its associated contact after a battery of suitable potentials has been connected to the winding of the relay. In this arrangement, one of these relays is brought into operation, its armature closing the associated contact after the predetermined time interval has elapsed, and thereafter that particular relay is deenergized and the other relay operated, a substantially similar time interval being required to cause the armature of the second relay to close its associated contact. The second relay then becomes deenergized, and the first relay again operates, and so on. The time feature of this invention prevents the alarm system from operating unless one of the conductors, such as L_1 , has caused relay R_1 to become operated for a definite space of time. Thus, in this illustration, if relay R_1 has remained operated for more than fifteen seconds, then the alarm circuit may become operated.

The winding of relay R_4 , also a dash-pot or slow-acting relay, may become energized by the flow of current from battery B_2 through its winding and through contact 19, contact 20, and ground. Due to the dash-pot action of this relay, a definite time limit, such as fifteen seconds, must elapse before armature 17 of that relay closes its associated contact. After this interval has elapsed, relay R_4 , which may preferably be a slow-release relay, becomes operated, the circuit connected to the winding of relay R_4 including armature 17 and its contact, the winding of relay R_4 , impedance Z_3 , battery B_2 , and ground. The armatures 21, 22, 23 and 24 are simultaneously attracted, armature 21 causing relay R_3 to become locked, the locking circuit including contact 20, armature 21, the winding of relay R_3 , impedance Z_3 , battery B_2 , and ground. At the instant the relay R_4 operates, relay R_4 releases its armature due to the fact that the grounded connection provided by contacts 19 and 20 of relay R_3 is opened. At the same in-

stant, the winding of relay R_5 becomes energized by the flow of current therethrough from battery B_2 , the circuit including the armature 22 of relay R_3 and its contact, and ground. Due to the fact that relay R_5 is also of the dash-pot type, a similar time interval of, for example, fifteen seconds, is required to cause armature 18 to close its associated contacts. After this time interval has elapsed, relay R_2 , which controls the action of the various selector arms, becomes operated, the circuit including battery B_4 , the winding of relay R_2 , armature 18 of relay R_5 and its contact, and ground. Shortly thereafter, armature 18 causes the winding of relay R_3 to become deenergized due to grounded connections at both terminals of said winding, this circuit including ground and armature 18 of relay R_5 and its contacts, the winding of relay R_3 , armature 21 of relay R_3 , contact 20 of that relay, and ground. At the same time, impedance Z_3 is serially connected to battery B_2 to prevent a short circuit, the circuit interconnecting battery B_2 and impedance Z_3 including armature 18 of relay R_5 and its associated contacts. Furthermore, the release of relay R_3 causes relay R_5 to be similarly released, the grounded circuit provided by armature 22 of relay R_3 being opened. Also, relay R_2 releases its armature because the series connection provided by armature 23 of relay R_3 becomes opened. Accordingly, the selector arms S_1 , S_2 and S_3 are simultaneously rotated, advancing their connections one step. Thereafter, the winding of relay R_4 becomes energized, and so it continues.

An alarm feature is provided in this invention, comprising an indicating device SL as a general alarm element, and a plurality of indicating devices SL_1 , SL_2 , SL_3 , SL_4 , etc., as individual alarm elements, one corresponding to each of the conductors L_1 , L_2 , L_3 , L_4 , etc. When one of the conductors, which has been previously charged, subsequently becomes tested through the winding of relay R_1 , and the continuous current is sufficient to move the armature 10 of relay R_1 downwardly, then relay R_6 will become operated. If relays R_1 and R_6 are still operated when relay R_5 is also operated, then the indicating device corresponding to the conductor connected to relay R_1 will indicate the presence of trouble, the circuit operating indicating device SL_1 corresponding to conductor L_1 , for example, including battery B_{11} , indicating device SL_1 , selector arm S_3 , armature 31 of relay R_6 , armature 23 of relay R_3 , armature 18 of relay R_5 , and ground. If, however, relay R_1 is released during the time relay R_3 is operated, relay R_6 releases and cannot become locked up again. Consequently, the operation of relay R_5 does not bring in an alarm. A relay R_{11} , whose winding is in parallel relationship with the signal lamp SL_1 , also becomes operated. Its armature is

therefore attracted, locking the circuit of relay R_{11} and providing a steady indication at indicating device SL_1 , the circuit including battery B_{11} , winding of relay R_{11} and the indicating device SL_1 in parallel relationship therewith, the armature of relay R_{11} , general release key G , and ground. A general indicating device SL and a corresponding relay R_{10} are also included in parallel relationship in a circuit which is similarly operated by virtue of the fact that this circuit is connected in parallel relationship with the circuit including the individual indicating device SL_1 and a corresponding relay R_{11} . The general indicating device SL and relay R_{10} are energized by the flow of current from battery B_{10} through the circuit including contacts 32 and 33 of key K_1 , the armature 31 of relay R_6 , armature 23 of relay R_3 , armature 18 of relay R_5 , and ground. As the winding of relay R_{10} becomes energized, its armature is attracted, locking its circuit and providing a steady indication at the indicating device SL , the circuit including battery B_{10} , the armature of relay R_{10} , general release key G , and ground.

It is to be observed that as any one of the individual signal lamps SL_1 , SL_2 , SL_3 , SL_4 , etc., corresponding to one of the conductors L_1 , L_2 , L_3 , L_4 , etc., become operated, the general signal lamp SL also becomes operated. The general signal lamp SL indicates to the attendant that one of the individual signal lamps has operated, and he may, accordingly, determine which of the conductors may be troublesome upon inspection of the individual signal lamps. After an inspection has been made, the attendant may release the general release key G , whereupon relay R_{10} , as well as signal lamp SL , will become deenergized, and one or more of the individual signal lamps SL_1 , SL_2 , SL_3 , SL_4 , etc., and the corresponding relays, previously operated, similarly become deenergized.

The operation of relay R_1 may be tested for leakage and insulation by operation of keys K_1 and K_2 . By throwing key K_1 upwardly, and key K_2 downwardly, impedance Z_4 will be connected to the winding of relay R_1 . Accordingly, current will flow from battery B_1 through impedance Z_2 , the winding of relay R_1 , contacts 34, 35, 36 and 37 of key K_2 , impedance Z_4 , and ground.

The various conductors L_1 and L_2 , etc., are disconnected from relay R_1 by virtue of the fact that the circuit including contacts 11 and 12 of relay K_1 is opened. If current flows through the winding of relay R_1 to suitably energize its winding, signal lamp SL_{21} will become illuminated, the circuit including battery B_5 , contacts 38 and 39 of key K_1 , signal lamp SL_{21} , armature 10 of relay R_1 and ground. Similarly, if insufficient current flows through the winding of relay R_1 , current will flow from battery B_6 through the

signal lamp SL_{22} in a similar circuit, thereby illuminating signal lamp SL_{22} .

The operation of relay R_1 may be tested for even greater impedance in circuit with its winding by maintaining key K_1 in its upward position and throwing key K_2 upwardly. Accordingly, impedances Z_4 and Z_5 are connected in series relationship with the winding of relay R_1 , the series circuit including impedance Z_4 , impedance Z_5 , contact 40 and 34 of key K_2 , the winding of relay R_1 , impedance Z_2 , battery B_1 , and ground.

Again, if current flows through the winding of relay R_1 sufficient to operate its armature, signal lamp SL_{21} will become illuminated, and if insufficient current flows there-through, signal lamp SL_{22} will become illuminated.

The individual conductors may be tested for various leak resistances by manipulation of keys K_1 and K_2 . By throwing key K_1 downwardly, and key K_2 also downwardly, impedance Z_4 will be connected in shunt with one of the conductors, the circuit including impedance Z_4 , contacts 37 and 36 of key K_2 , contacts 35 and 34 of key K_2 , the winding of relay R_1 , impedance Z_2 , battery B_1 , and ground. Since the circuit including contacts 11 and 12 of key K_1 remains closed, impedance Z_4 will bridge the particular conductor connected therethrough to the winding of relay R_1 . Of course, that particular conductor is connected to the winding of relay R_1 through selector arm S_2 . If the shunting of the individual conductor by impedance Z_4 is sufficient to cause the operation of relay R_1 , signal lamp SL_{21} will become illuminated by the flow of current therethrough from battery B_1 , as described hereinbefore. If not, signal lamp SL_{22} will become illuminated. To test a particular conductor for a greater leak resistance, key K_2 may be thrown upwardly. Then impedances Z_4 and Z_5 will be connected to the winding of relay R_1 in shunt with that particular conductor. Either signal lamp SL_{21} or signal lamp SL_{22} will become operated in accordance with the state of energization of relay R_1 . When key K_1 is thrown downwardly to test a particular conductor for resistance in shunt therewith, the alarm circuits, which have contacts 32 and 33 as elements, are opened. Thus, the alarm feature of this invention is disconnected.

While the alarm feature of this invention has been shown herein as embodying visible indicating devices merely for the purpose of illustration, it will be clearly understood that other types of alarms or automatic measuring equipments, or the like, may be employed instead thereof, within the scope of the invention.

While this invention has been shown and described in one particular embodiment merely for the purpose of illustration, it will be understood that the general principles of

this invention may be applied to other and widely varied organizations, without departing from the spirit of the invention or the scope of the appended claims.

What is claimed is:

1. The method of determining the insulation properties of a conductor, which consists in charging the conductor to a definite voltage, transmitting current through the conductor at a rate which diminishes until it reaches a predetermined value, and determining whether the current flowing through the conductor is greater than or less than said predetermined value.

2. The method of determining the insulation properties of a plurality of conductors, which consists in successively charging each of said conductors to a definite voltage, successively transmitting current continuously through each of said conductors in order to learn whether the continuous current through each conductor is greater than or less than a definite value, and indicating which conductors transmit currents less than the definite value.

3. The method of detecting trouble in the conductors of cables due to low insulation or high leakage, which consists in progressively measuring the resistance of the conductors of the cables upon the application of continuous currents to determine whether the insulation and leakage properties are satisfactory, and visually indicating departures of the insulation and leakage values from their normal values.

4. The method of detecting trouble in a plurality of transmission channels due to low insulation and high leakage, which consists in progressively charging the various transmission channels to substantially equal voltages, progressively determining the continuous current magnitudes of the various conductors when connected to an impedance element of definite magnitude, and indicating which channels of transmission are enabled to maintain suitable continuous currents for time intervals of a predetermined minimum duration.

5. The method of detecting trouble in a plurality of conductors due to low insulation, which consists in progressively charging the various conductors to substantially the same voltage, progressively transmitting current through each of the various conductors for a substantial time interval, and indicating which conductors are enabled to maintain a current of a predetermined magnitude continuously throughout said time interval.

6. A testing system comprising a plurality of telephone conductors, a plurality of indicating devices one corresponding to each telephone conductor, means for charging each telephone conductor to a definite voltage, and means whereby current may be transmitted over each of said telephone conductors con-

tinuously in order that it may be possible to determine whether the continuous current is greater than a predetermined value, each indicating device becoming operated when the continuous current flowing over the corresponding conductor exceeds the predetermined value.

7. A testing system comprising a plurality of telephone conductors, a plurality of indicating devices, a selector having three selector arms revolving in synchronism, a battery whose voltage may be applied to said telephone conductors in progression through one of the selector arms, a detecting device to which said telephone conductors may be connected in progression through another of the selector arms in order that current may flow therethrough, each indicating device being associated with the third selector arm and becoming operated if the current from the corresponding telephone conductor exceeds a predetermined value.

8. A testing system for testing a plurality of telephone conductors for insulation properties, leakage and the like, comprising a selector having three selector arms revolving in synchronism, a battery whose voltage may be applied in progression to said conductors through one of the selector arms, a detecting device to which said conductors may be connected in progression through another of the selector arms in order that current may flow through said detecting device continuously through a definite time interval, and a plurality of indicating devices one corresponding to each conductor, each indicating device being controlled by the third selector arm and becoming operated when the continuous current through said detecting device is outside a range of predetermined values.

9. A testing system comprising a plurality of telephone conductors, a plurality of indicating devices one corresponding to each telephone conductor, means for charging each

telephone conductor to a definite voltage, means for transmitting current over each telephone conductor and through a device having a definite impedance, each indicating device becoming operated when the current flowing over the corresponding telephone conductor is greater than a predetermined value for a minimum time interval.

10. The combination of a plurality of conductors, a plurality of indicating devices one corresponding to each conductor, means for charging each conductor to a definite electrostatic capacity, a detecting device through which said conductors may transmit current, time control apparatus comprising a pair of relays which become alternately operated for a definite time interval, each indicating device becoming operated when the corresponding conductor transmits current greater than a predetermined value throughout a period of time greater than the definite time interval of said time control apparatus.

11. A testing system for a plurality of telephone conductors, comprising means for charging each of the conductors to a definite electrostatic capacity, a detecting device, means for transmitting current through said detecting device over the various telephone conductors, a plurality of indicating devices one corresponding to each telephone conductor, each indicating device becoming operated when the corresponding telephone conductor transmits current greater than a definite value as a result of its low insulation resistance or high leakage or the like, and a general indicating device to indicate the operation of one or more of said individual indicating devices corresponding to the various telephone conductors.

In testimony whereof we have signed our names to this specification this 12th day of September, 1927.

PAUL G. EDWARDS.

HAROLD W. HERRINGTON.