


(No Model.)

C. L. BUCKINGHAM.
DUPLEX TELEGRAPH.

No. 258,367.

Patented May 23, 1882.

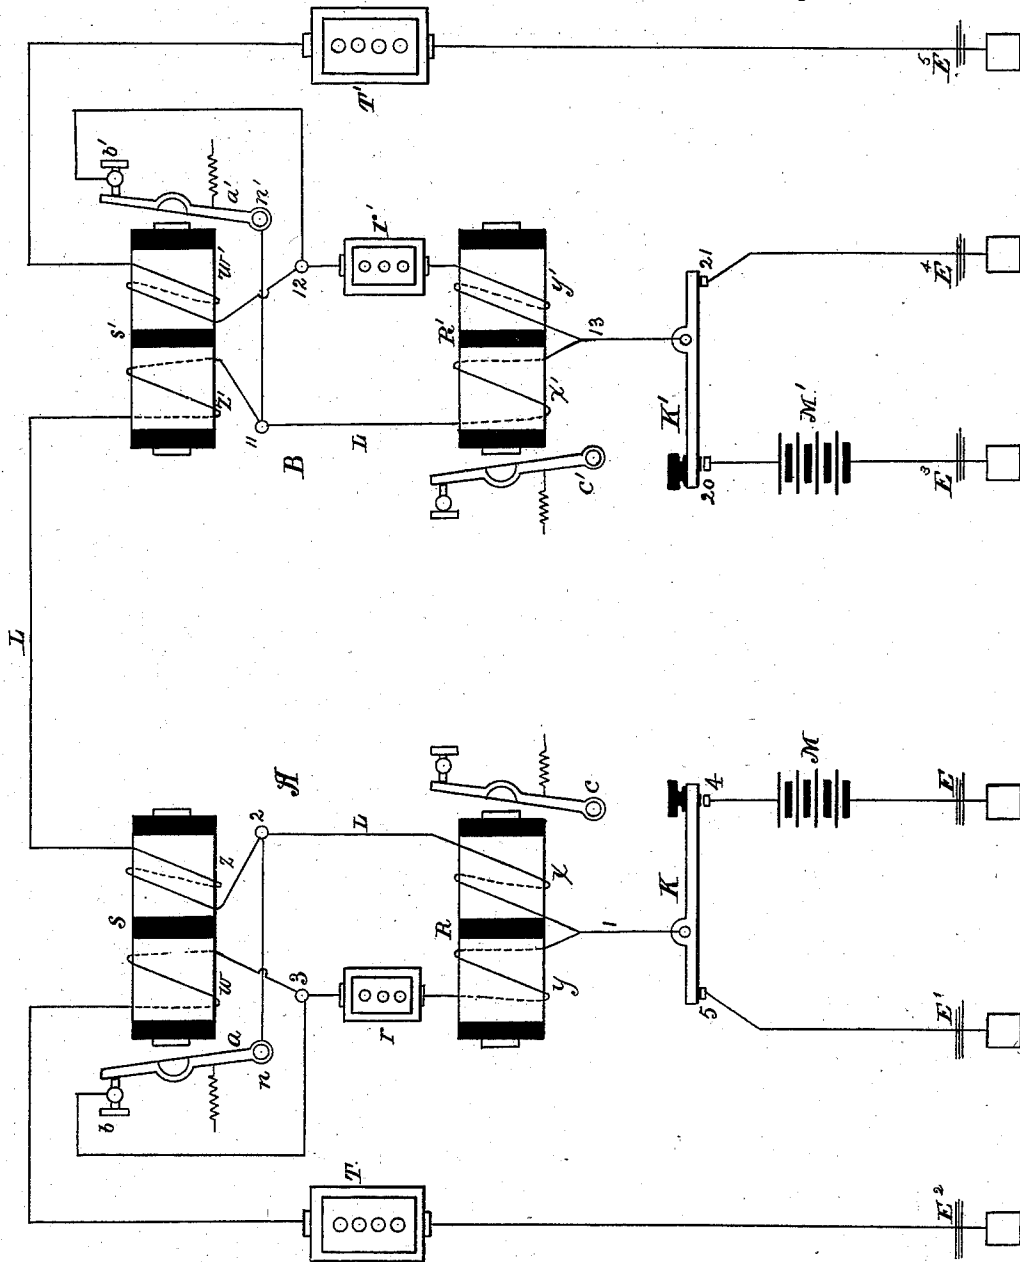

WITNESSES:

H. B. Vanisg.
Wm. Arnone

INVENTOR

C. L. Buckingham

UNITED STATES PATENT OFFICE.

CHARLES L. BUCKINGHAM, OF ELIZABETH, NEW JERSEY, ASSIGNOR TO THE
WESTERN UNION TELEGRAPH COMPANY, OF NEW YORK, N. Y.

DUPLEX TELEGRAPH.

SPECIFICATION forming part of Letters Patent No. 258,367, dated May 23, 1882.

Application filed February 11, 1882. (No model.)

To all whom it may concern:

Be it known that I, CHARLES L. BUCKINGHAM, of Elizabeth, county of Union, and State of New Jersey, have invented a new and useful Improvement in Telegraphy, of which the following is a description, reference being had to the accompanying drawing, forming a part hereof.

My invention is applicable to differential systems of telegraphy for the simultaneous transmission of messages upon a single line in opposite directions, and has for its special object the neutralization in the receiving-instruments of duplex, quadruplex, or sextuplex telegraphy of disturbing effects due to static induction upon the main line, and to this end I employ at each station a normally-closed bridge or branch conductor to join the main and artificial lines. The bridge or branch conductor is normally closed through a contact-point and the armature of an electro-magnet, and the position of said armature, whether to open or close the bridge, depends upon the currents which are transmitted by the keys of the home and distant stations. Where only signals are being sent from the home station the bridge remains closed, and from this fact equal strengths of current will flow through the two oppositely-wound coils of the home receiving-relay both while the main line is receiving its inductive charge and thereafter, during the continuance of a signal and after the main line has received its full inductive charge.

It is well understood in the art of duplex telegraphy that in a differential duplex while the main line is receiving its inductive charge a stronger current will flow through the main-line coil than through the oppositely-wound coil in the artificial circuit, and that the differential receiving-relay will respond to give a false signal. The bridge, however, which I employ effects a complete balance of currents sent through them from the home station. Following each signal that is sent from the home station is a quick static or inductive discharge from the main line in a direction opposite to that of the current of charge. The current of inductive discharge being similar to a signal-current from a distant station, though shorter in duration, will tend to cause the bridge

to be broken. However, the armature of the bridge is so adjusted that the bridge will practically remain unbroken from the effects of said inductive discharge, and it will distribute itself in passing to earth equally through the two oppositely-wound coils of the receiving-relay, and no false signal will follow. While the bridge will not be broken by a quick inductive discharge from the main line, a battery-current sent from a distant station sufficiently prolonged to produce a signal at the home station will cause the bridge to be opened and remain open during the signal, wherefore the current will only pass through one coil of the home receiving-relay, and a signal will be given. By this means the main-line inductive charge and discharge respectively produce neutral effects upon the receiving-instruments when signals are sent from the same stations, and this end is accomplished without the necessity of adjustment to change the electro-static capacity of an artificial line to balance the highly-variable inductive condition of the main line.

I will now explain my invention by reference to the accompanying drawing.

The drawing represents an ordinary duplex system in which the bridge at each station is broken by means of an ordinary differential electro-magnet whose coils are in the main and artificial lines, respectively.

A and B represent two distant stations joined by a main line, L.

M and M' are two main-line batteries, arranged to oppose each other when simultaneously connected to line. In all other respects the devices of station B are identical with those of station A, and a description of apparatus of one station will suffice for that of both.

R is an ordinary differential receiving-relay, having oppositely-wound coils *x* and *y*, forming parts respectively of the main and artificial circuits, and *c* is its armature-tongue.

K is an ordinary transmitter-key, though in practice a continuity-preserving one is preferable.

T is a resistance placed in the artificial circuit equal in amount to the main-line resistance. The artificial line is connected to earth at E².

S is a differential electro-magnet altogether similar in general respects to relay R, its coils z and w being oppositely wound and forming parts of the main and artificial lines.

2 and 3 are points in the main and artificial lines, joined with a bridge or branch conductor of very low resistance, which is usually closed through armature a and stop b .

r is a small rheostat for establishing a proper proportion of resistances between points 1 and 2 and 1 and 3.

When K is depressed the current of battery M divides at point 1, one portion passing through coils x and z and the other through coils y and w of the relay R and electro-magnet S. When the two portions of the current thus divided are equal the electro-magnetic effects of x and y are neutral, also those of z and w ; but owing to the greater capacity of the main than the artificial line for a static charge the current from M at the beginning of each signal will, if there be no compensating device, be stronger through coils x and z of the main line than through coils y and w of the artificial circuit. However, if points 2 and 3 be connected by a bridge which is normally closed, it is obvious that until such bridge is broken the current flowing through coil x must equal that passing through y , even if the current which flows to the main line from point 2 is much greater than that flowing over the artificial line from point 3 to E'. Primarily, therefore, owing to the normally-closed bridge joining points 2 and 3, the current of M will be divided equally through the coils x and y ; but while the bridge causes an equal division of current between coils x and y , more current at the same time will flow through coil z than w , whereby S will become magnetic and tend to attract its armature. However, if S be slightly sluggish and armature a properly adjusted, the bridge will not be broken until the main line will have received its inductive charge. After the line has received its inductive charge the current from M will divide itself at 1 equally, and it will be immaterial if the bridge be momentarily broken.

When the resistance of the bridge compared with that of either x or y is practically zero, and resistances of x and y are equal, it will be observed that at the moment of charging the main line, when more current is flowing into said main line than to the artificial circuit, a current will be set up in the bridge from 3 toward 2, and that the division of current at point 1 will be equal through x and y .

The removal of battery M after sending each signal is accompanied by a static discharge opposite in direction to the corresponding current of charge.

The current of static discharge which would otherwise pass through only coil x of the differential relay R divides equally at point 2, one portion passing to earth by coil y and the other by the oppositely-wound coil z , whereby the effects of static discharge are neutral upon the receiving-relay. As the static discharge

from the line passes through only one coil of S, it will tend to break the bridge; but by a proper construction of S and adjustment of a the bridge will not be broken before a complete discharge can occur. While the static discharge of the main line is not sufficient to cause the bridge to be broken, a sufficiently-prolonged current from a distant station to make a telegraphic character will attract armature a and retain it during the time of the signal, and the current will thereby pass wholly through coil x to effect a signal. If the batteries MM' are both simultaneously upon the line and battery M be then removed, the accompanying static discharge will not neutralize itself by passing through both coils x and y , as the bridges are broken at both stations when both batteries are to line, and as the bridge at station A so remains broken when M is removed. The static discharge under this condition takes place wholly through x ; but this will produce no false signal by attracting c , as c is already attracted from the agency of the closed key at the distant station. The static discharge will therefore only conspire to hold c in its proper position.

This patent is intended to cover parts of my invention shown but not claimed in the application for Letters Patent filed by me on the 16th day of June, 1881. I disclaim the method of rendering the receiving relay or relays of a telegraphic system for simultaneous transmission in opposite directions insensible to the effects of inductive charge and discharge of the main line, consisting in causing both the inductive charge and discharge respectively to be divided before passing through the receiving-instrument to avoid false signals, since that method is claimed in my aforesaid application; nor do I herein claim any part claimed in said application filed June 16, 1881.

What I claim, and desire to secure by Letters Patent, is—

1. In a telegraph system for simultaneous transmission in opposite directions, the combination, substantially as specified, at each station of the main line, an artificial line, a differential receiving-instrument, a differential electro-magnet whose oppositely-wound coils are in the main and artificial lines, respectively, and a bridge-conductor joining the main and artificial lines which is opened and closed by the agency of said differential electro-magnet.

2. In combination with a duplex-telegraph line, an artificial line, a differential receiving-relay, a normally-closed bridge or branch conductor, and a differential electro-magnetic circuit-breaker whose armature is adjusted to be insensible to the static discharge from the line, but which is actuated by a sufficiently-prolonged current from a distant station to make a signal, whereby the static discharge will pass to earth through both coils of the differential receiving relay or instrument, while a prolonged signal-current sent from a distant station will cause the bridge-conductor to be broken.

3. The combination, substantially as speci-

5 fied, of a main and artificial line, differential relay R, differential electro-magnetic circuit-breaker S, and a normally-closed bridge which is broken and closed by means of said circuit-breaker S.

10 4. In a telegraph system for simultaneous transmission in opposite directions, the combination at each station of a main line, an artificial or compensating circuit, a receiving-instrument, a bridge or branch conductor for connecting the main and artificial lines,

and an automatic circuit-breaker for opening and closing said bridge, whereby said bridge may be closed both at the time of inductive charge and discharge of the main line, substantially as specified. 15

Executed by me this 7th day of February, 1882.

CHARLES L. BUCKINGHAM.

Witnesses:

W. B. VANSIZE,

WM. ARNOUX,